



Hanley Chesworth Ltd

CLOSURE INSTRUCTIONS

BOLT RING CLOSURE FOR OPEN HEAD DRUMS

- CHECK GASKET** – to ensure cover gasket is properly fitted into cover groove (see Fig. 1 or 2).
- PLACE COVER ON DRUM** – being careful to properly seat gasket all around curl (see Fig. 3).
- POSITION & SEAT RING** – with lugs downward. Ensure the inner channel of the closure ring engages entire drum curl and cover (see Fig. 4). Apply downward pressure on cover. Use a non-sparking dead-blow mallet to further seat cover and drum curl into the inner channel of the ring.
- INSERT BOLT** – through the unthreaded lug of the ring. Assemble the locking hex nut onto the threaded end of the bolt and tighten into the threaded lug (see Fig. 5). Close the ring to an initial gap of about 1/2".
- TIGHTEN THE BOLT** – with a calibrated torque wrench while using downward pressure on the cover and hammering the outside of the ring with a non-sparking dead-blow mallet to further seat the ring. Continue tightening and hammering the ring until the torque stabilizes at 55 - 60 ft. lbs. and does not decrease when further hammering on the ring circumference is performed. Ring ends must not touch. (Effective 25 September, 2006 and in accordance with CFR 175.2(c), we have revised this procedure to use torque as the most effective closure requirement.)
- LOCK RING** – by tightening the nut against the unthreaded lug (see Fig. 6).

OPEN HEAD DRUM - LEVERLOCK CLOSURE

- CHECK GASKET** – to ensure cover gasket is properly fitted into cover groove (see Fig. 1 or 2).
- PLACE COVER ON DRUM** – being careful to properly seat gasket around curl (see Fig. 3).
- OPEN LEVERLOCK** – and place expanded ring on to the drum cover with the vertical-skirt hugging the drum body (see Fig. 7)
- CLOSE LEVERLOCK** – by slowly and cautiously pulling the LEVERLOCK so that the outer ring engages the cover / body juncture. Downward pressure along with tapping the outside of the ring may assist in an even closure (see Fig. 8).
- ENGAGE LOCK** – to complete closure




DRUMS WITH FITTINGS

- CHECK GASKETS** – and ensure gasket is properly seated on plug.
- TIGHTEN** – to specifications listed below, and do not cross thread.

PLUG TYPE	Tri-Sure			Rieke (plastic)	Rieke (steel)		Nuc-Fil filters
	Buna	Poly or Teflon	PE/PP (composite drums)	—	poly	all other	
1/4" plug	12 ft-lbs	20 ft-lbs	—	9 ft-lbs	20 ft-lbs	15 ft-lbs	8 - 12 ft-lbs
2" plug	20 ft-lbs	30 ft-lbs	10 ft-lbs	20 ft-lbs	40 ft-lbs	30 ft-lbs	—

IMPORTANT

A drum is properly closed only when all steps are completed in the manner and sequence indicated.

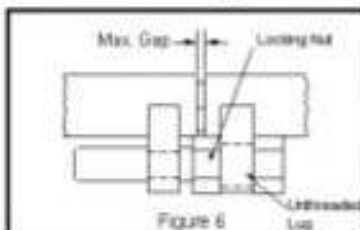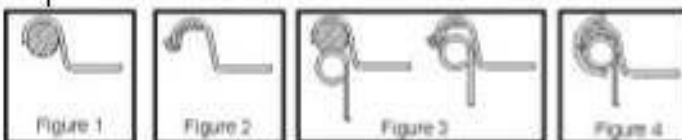

Hanley Chesworth Ltd

PO Box 292, Tarporley, Cheshire, CW6 9LB, UK

Phone: 01270 528884 or 07811 407947 Fax: 01270 528885 email : Richard@chesworth.co.uk